
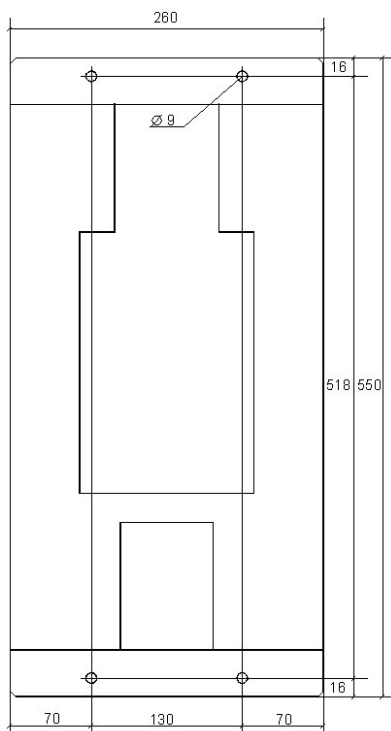
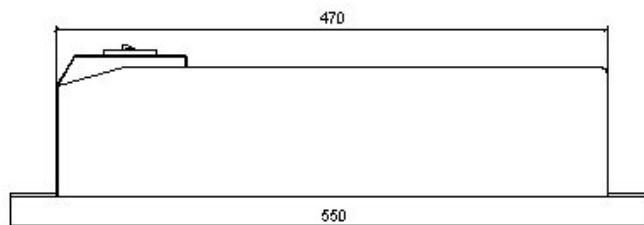


Modello NG9

Lista dei tempi di ricarica e assorbimenti dalla rete

CARICABATTERIE IN ALTA FREQUENZA NG9 TRIFASE 380/400 VAC					
			TEMPO DI RICARICA	ASSORBIMENTO DA RETE	CORRENTE DI FASE
	Codice	Capacità batteria Ah C5	ORE	Pa (W)	I eff (A)
72V 100A	F8HVT0	960	12	10160	20
	F8HVT1	880	11		
	F8HVT2	800	9.30		
	F8HVT3	720	9		
	F8HVT4	640	8.20		
	F8HVT5	560	7.40		
	F8HVT6	480	7		
	F8HVT7	400	6.30		
80V 80A	F8ITT0	780	12	10160	20
	F8ITT1	700	11		
	F8ITT2	640	9.30		
	F8ITT3	600	9		
	F8ITT4	540	8.20		
	F8ITT5	480	7.40		
	F8ITT6	400	7		
	F8ITT7	320	6.30		

Modello NG5 NG7 NG9 Ingombri e dime di foratura

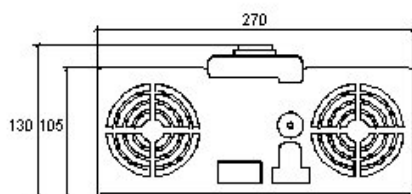

Peso per tutti i modelli Kg 9

N.B. Tutte le quote sono in mm.