
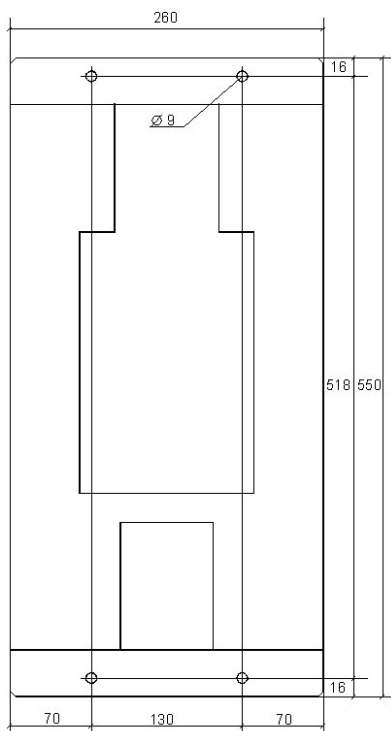
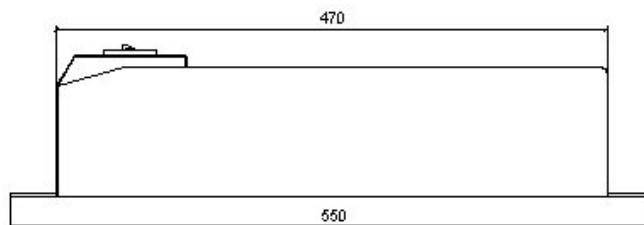


Modello NG7

Lista dei tempi di ricarica e assorbimenti dalla rete

CARICABATTERIE IN ALTA FREQUENZA NG7 TRIFASE 380/400 VAC					
	Codice	Capacità batteria Ah C5	TEMPO DI RICARICA	ASSORBIMENTO DA RETE	CORRENTE DI FASE
			ORE	Pa (W)	I eff (A)
48V 100A	F8EVT0	1000	12	6780	14
	F8EVT1	880	11		
	F8EVT2	800	9.30		
	F8EVT3	720	9		
	F8EVT4	640	8.20		
	F8EVT5	560	7.40		
	F8EVT6	480	7		
	F8EVT7	400	6.30		
72V 70A	F8HST0	670	12	7120	14
	F8HST1	615	11		
	F8HST2	560	9.30		
	F8HST3	505	9		
	F8HST4	450	8.20		
	F8HST5	390	7.40		
	F8HST6	335	7		
	F8HST7	280	6.30		
80V 65A	F8IST0	640	12	7340	14
	F8IST1	550	11		
	F8IST2	500	9.30		
	F8IST3	450	9		
	F8IST4	400	8.20		
	F8IST5	350	7.40		
	F8IST6	300	7		
	F8IST7	250	6.30		

Modello NG5 NG7 NG9 Ingombri e dime di foratura

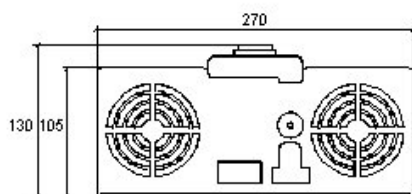

Peso per tutti i modelli Kg 9

N.B. Tutte le quote sono in mm.